

DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point



Technical Data Sheet

Features:

- 0.54" (inch) digit height
- Low current operation
- Excellent characters appearance
- RED (632nm) color digits
- Common cathode matrix
- Special pinout optimized for 8 segment drivers (such as MAX7219)
- RoHS Compliant, wave solderable (please read notes)

Description:

- The KWA4-544CVB is a 0.54 inch (13.80mm) height Quadruple digit Alphanumeric display.
- The display provides excellent reliability in bright ambient light.
- The device has white segments on a matte black surface.
- Standard 16-pin device with 2.54mm pin pitch

Applications:

- Home appliances
- Instrument panels
- Digital readout displays
- Low parts count applications

Order Code: DEX544CVB


DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point




Technical Data Sheet

Package Dimension:

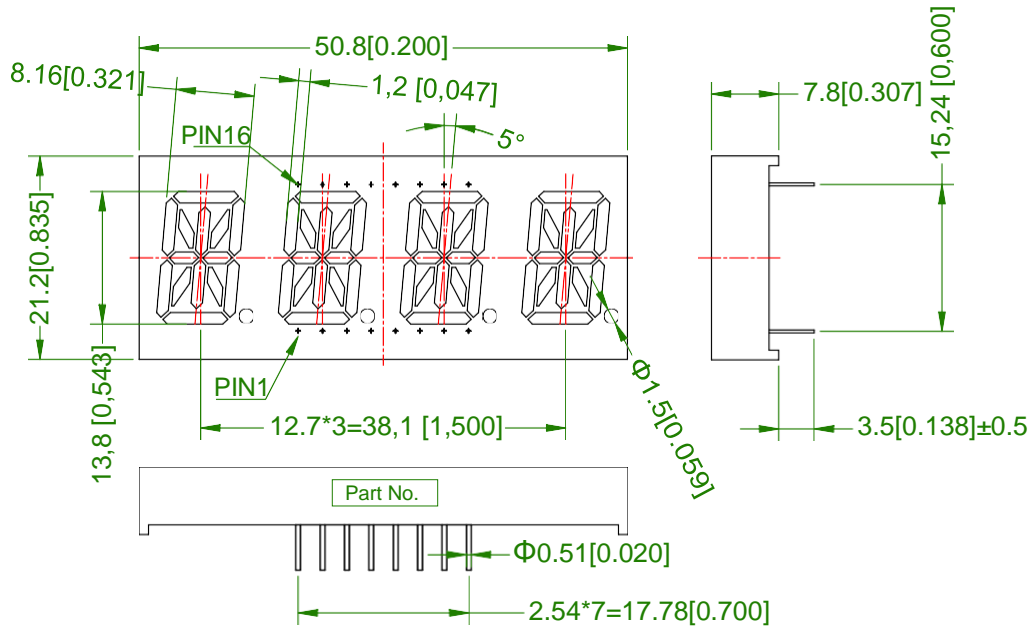

SCALE 2:1

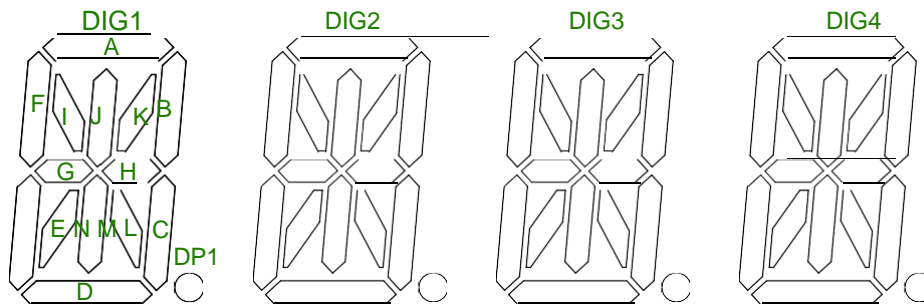

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.



DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point



Technical Data Sheet

Internal Circuit Diagram:

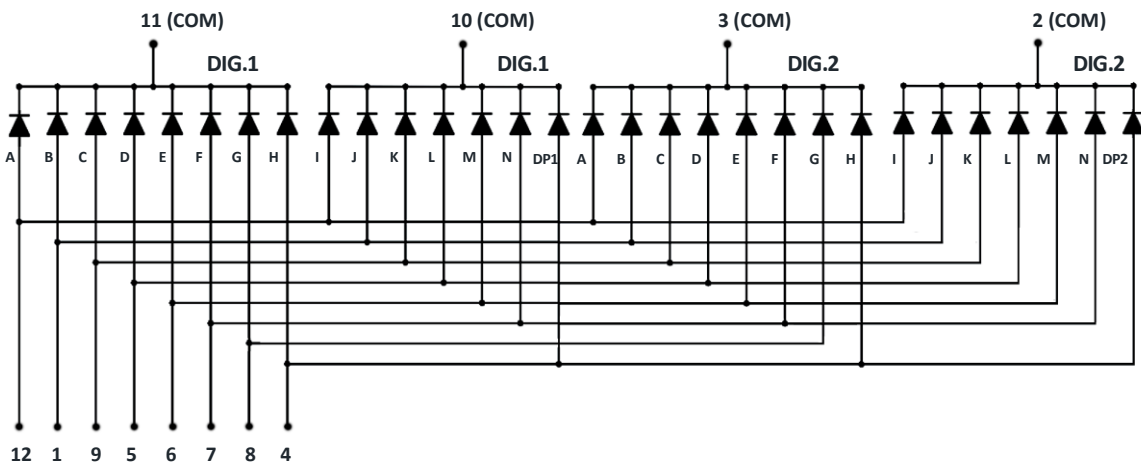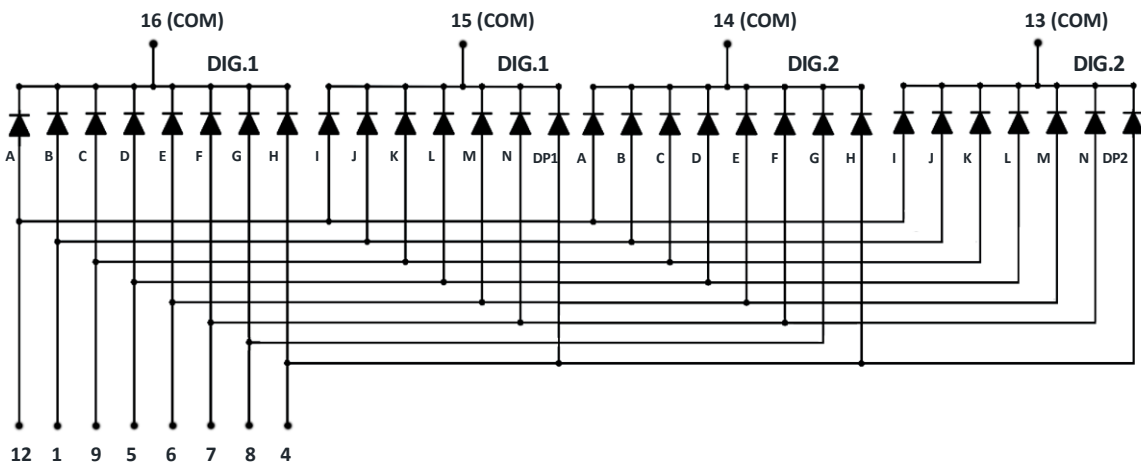

DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point

Technical Data Sheet



Absolute Maximum Ratings at Ta=25°C Parameters

Parameters	Symbol	Max	Unit
Power Dissipation Per Segment	P_d	48	mW
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	I_{FP}	100	mA
Forward Current Per Segment	I_F	20	mA
Reverse Voltage Per Segment	V_R	5	V
Operating Temperature Range	T_{opr}	-40°C to +80°C	
Storage Temperature Range	T_{stg}	-40°C to +85°C	
Soldering Temperature	T_{sld}	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Average Luminous Intensity	I_v	10.0	20.0	---	mcd	IF=10mA (Note a)
		20.0	40.0	---	mcd	IF=20mA (Note a)
Luminous Intensity Matching Ratio	I_{v-m}	---	---	2:1		IF=10mA
Peak Emission Wavelength	λ_p	---	632	---	nm	IF=20mA
Dominant Wavelength	λ_d	---	624	---	nm	IF=20mA (Note b)
Spectral Line Half-Width	$\Delta\lambda$	---	20	---	nm	IF=20mA
Forward Voltage Per Segment	V_F	---	2.0	2.4	V	IF=20mA
Reverse Current Per Segment	I_R	---	---	50	μA	VR=5V

Notes:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.






DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point

Technical Data Sheet



Typical Electrical / Optical Characteristics Curves @ 25°C Ambient Temperature Unless Otherwise Noted

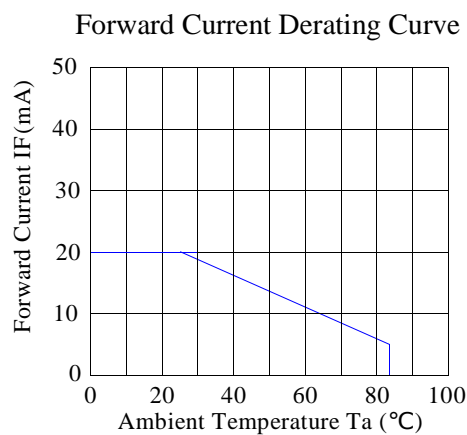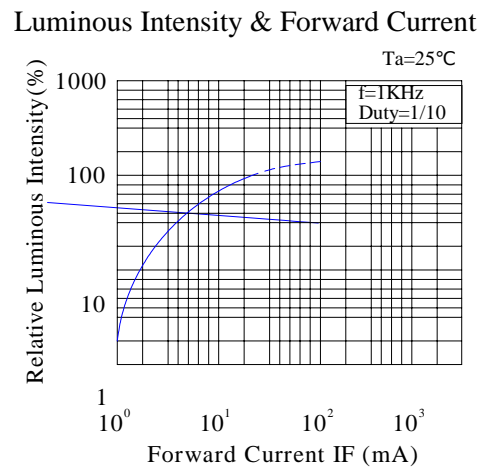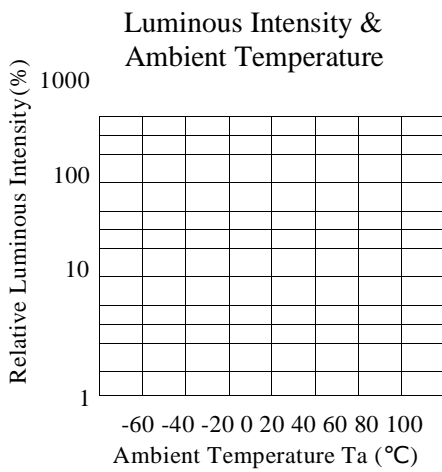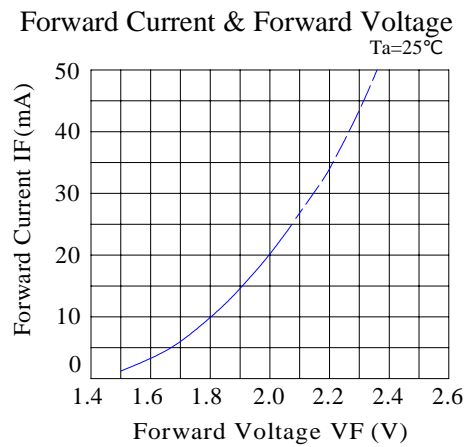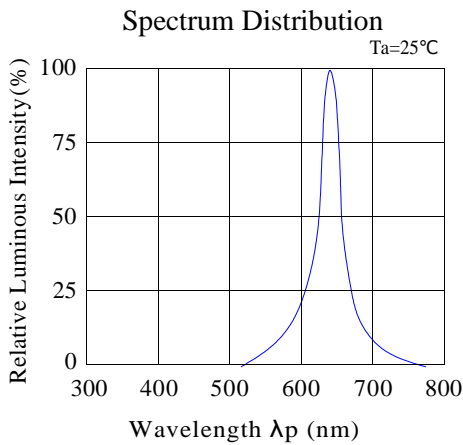


DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point

Technical Data Sheet



Packing & Label Specifications:

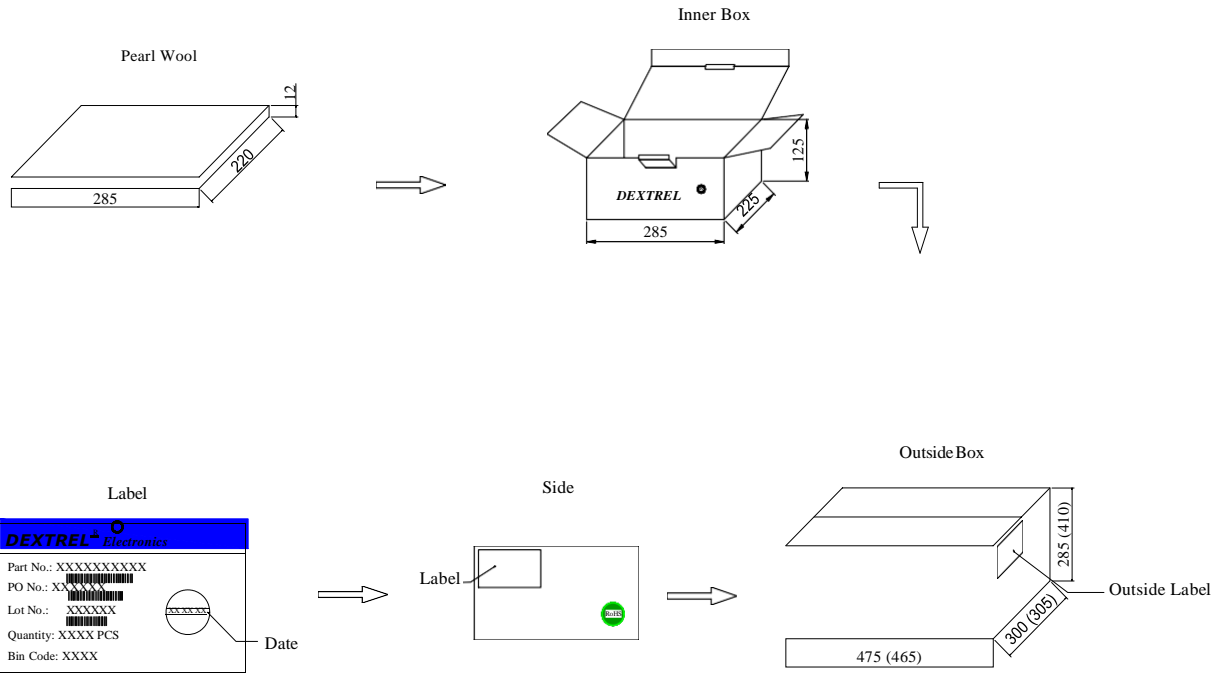

DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point

Technical Data Sheet



Terms and conditions for the usage of this document:

- a. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- b. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- c. When using the product referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Dextrel will not be responsible for any subsequent issues.
- d. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Dextrel representative for further assistance.
- e. The contents and information of this document may not be reproduced or re-transmitted without permission by Dextrel.
- f. Customer must apply appropriate current limiting.
- g. Storage
 1. Before opening the package, the LEDs should be kept at 30°C or less, and 80% RH or less.
 2. An opened LED package should be used within a year.
 3. After opening the package, the LEDs should be kept at 30°C or less, and 60% RH or less.

DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point

Technical Data Sheet




Through Hole Display Mounting Method

Lead Forming:


1. Do not bend the component leads by hand without proper tools.
2. The leads should be bent by clinching the upper part of the lead firmly such that the bending force is not exerted on the plastic body.

Installation:

1. The installation process should not apply stress to the lead terminals.
2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching the lead terminals.





Not Recommended

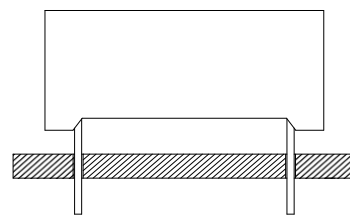

Recommended

3. The component shall be placed at least 5mm from edge of PCB to avoid damage caused excessive heat during wave soldering.

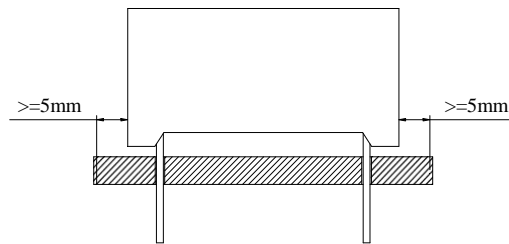


DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point



Technical Data Sheet

Recommended Wave Soldering Profiles

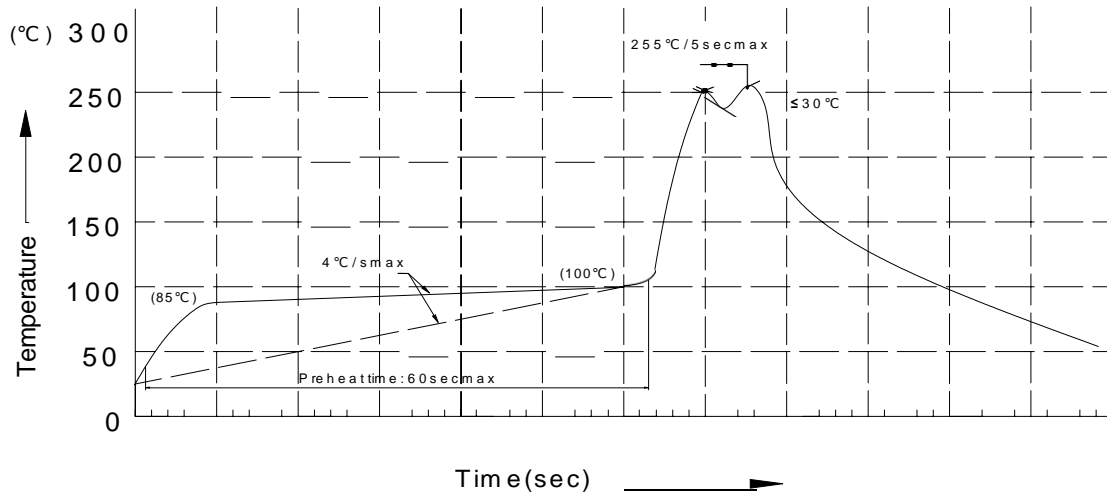

Notes:

1. Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C.
2. Peak wave soldering temperature between 245°C~255°C for 3 sec (5 sec max).
3. Do not apply stress to the epoxy resin while the temperature is above 85°C.
4. Fixtures should not incur stress on the component when mounting and during soldering process.
5. SAC 305 solder alloy is recommended.
6. No more than one wave soldering pass.
7. During wave soldering, the PCB top-surface temperature should be kept below 105°C.

Soldering General Notes:

1. Through-hole displays are incompatible with reflow soldering.
2. If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Dextrel for compatibility.

DEX544CVB

0.54 inch (13.80 mm), Red 4 Digit 14-segment
Alphanumeric LED Display with decimal point




Technical Data Sheet

Cleaning:

1. Mild “no-clean” fluxes are recommended for use in soldering.
2. If cleaning is required, Dextrel recommends washing components with water only.
Do not use harsh organic solvents for cleaning because they may damage the plastic parts.
3. The cleaning process should take place at room temperature and the devices should not be washed for more than one minute.
4. When water is used in the cleaning process, immediately remove excess moisture from the component with forced-air drying afterwards.

Circuit Design Notes:

1. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
2. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.

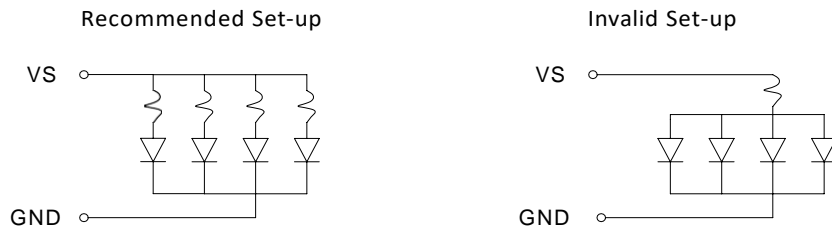

3. The driving circuit should be designed to protect the LED against reverse voltages and transient voltage spikes when the circuit is powered up or shut down.
4. The safe operating current should be chosen after considering the maximum ambient temperature of the operating environment.
5. Prolonged reverse bias should be avoided, as it could cause metal migration, leading to an increase in leakage current or causing a short circuit.